

Custom Connectors

Specialized Products For All Applications

Material Composition

ASTM A1003/A1003M Structural Grade 50 (345) 50ksi (345MPa) minimum yield strength, 65ksi (450MPa) minimum tensile strength, with ASTM A653/A653M G90 (Z275) hot dipped galvanized coating. Available in 33mil minimum thickness (20 gauge, 0.0346" design thickness), 43mil minimum thickness (18 gauge, 0.0451" design thickness), 54mil minimum thickness (16 gauge, 0.0566" design thickness), 68mil minimum thickness (14 gauge, 0.0713" design thickness), 97mil minimum thickness (12 gauge, 0.1017" design thickness) or 118 mil minimum thickness (10 gauge, 0.1242" design thickness).

Notes

- The Steel Network is equipped to manufacture cold-formed steel connections of any size and shape. Some examples of custom products manufactured are shown and described below.
- Please allow reasonable time for production of all custom parts.
- Structural testing is available upon request.
- Contact TSN for assistance designing custom products for special applications or requirements.

Nomenclature


Contact TSN with product requirements

** Special product drawing is required for all non-standard products.*

Example Details




Custom VertiClip® SLB

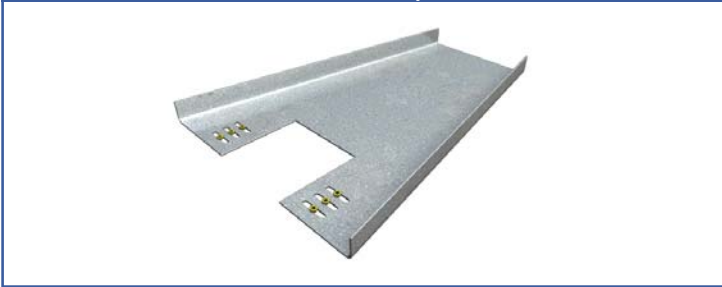

Unique condition brought to TSN by Specialty Engineer. TSN helped design a solution and test & fabricate clips.

Custom VertiClip® Splice (Notched)

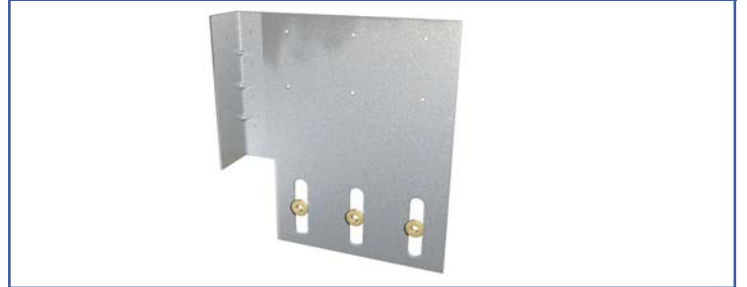

Unique condition brought to TSN by Specialty Engineer. TSN helped design a solution and test & fabricate clips.

Custom VertiClip® Splice (Angled)



Unique condition brought to TSN by Specialty Engineer. TSN helped design a solution and test & fabricate clips.

Custom VertiClip® Splice



Connector for parallel wall studs. One stud rigidly attached to wall stud. The other stud accommodates vertical deflection of the primary structural frame.

Custom VertiClip® SLS (extra long)



Retrofit situation where a stud does not run full height, creating a situation where a modified VertiClip SLS was lengthened to bridge a large gap from the structure of 26".

Custom VertiTrak® VTD (VertiClip® SLD with Elongated Slots)



VertiTrack VTD modified to accommodate 4" slots in VertiClip SLD provides an effective, efficient solution for large demising walls typically seen in retail stores and theaters.