
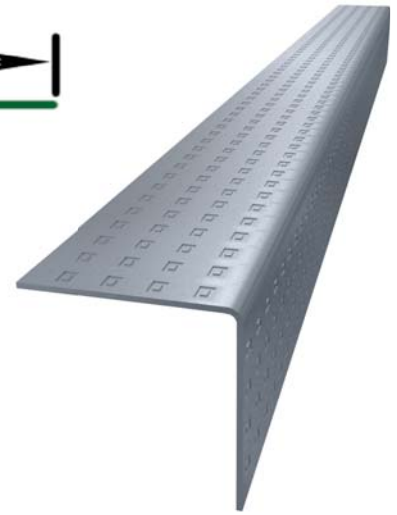
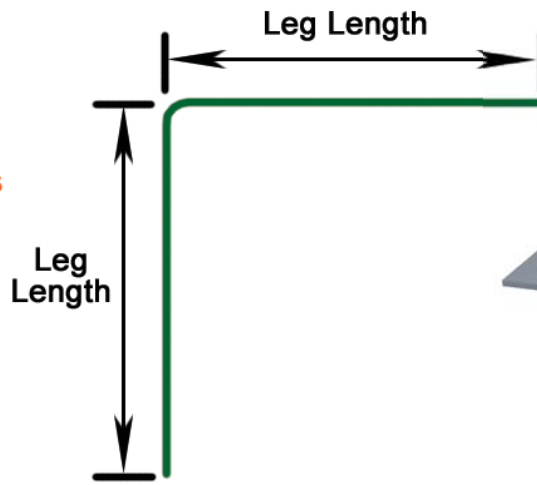


PrimeWall® Drywall Accesories

Multi-Purpose Angle

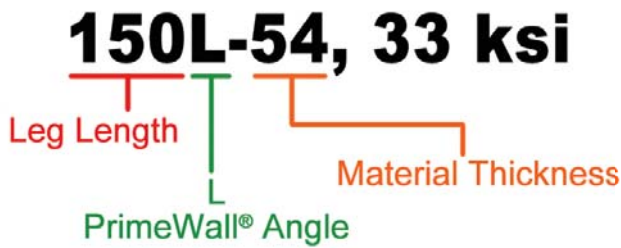

Material Composition

ASTM A1003/A 1003M Non Structural Grade 33 (230), 33 ksi (230 MPa) minimum yield strength, G40 (Z120) hot-dipped galvanized coating, or equivalent conforming to ASTM C645. Other steel materials with G40 coating are also available upon request.

Section	Product Profile					
	Leg Length	Gauge	Design Thickness	Min Steel Thickness	Inside Bend Radius	Weight
	(B)	(ga)	(t)	(t _{min})	(R)	(lbs/ft)
150L-18, 33 ksi	1.5	25	0.0188	0.0179	0.0625	0.195
150L-30, 33 ksi	1.5	20	0.0312	0.0296	0.0625	0.324
150L-43, 33 ksi	1.5	18	0.0451	0.0428	0.0625	0.468
150L-54, 33 ksi	1.5	16	0.0566	0.0538	0.0625	0.588
200L-18, 33 ksi	2	25	0.0188	0.0179	0.0625	0.260
200L-30, 33 ksi	2	20	0.0312	0.0296	0.0625	0.432
200L-43, 33 ksi	2	18	0.0451	0.0428	0.0625	0.624
200L-54, 33 ksi	2	16	0.0566	0.0538	0.0625	0.783
300L-18, 33 ksi	3	25	0.0188	0.0179	0.0625	0.391
300L-30, 33 ksi	3	20	0.0312	0.0296	0.0625	0.649
300L-43, 33 ksi	3	18	0.0451	0.0428	0.0625	0.937
300L-54, 33 ksi	3	16	0.0566	0.0538	0.0625	1.176

Important Notes

1. 18 mil angle includes knurled legs.
2. PrimeWall Angle is produced to meet or exceed ASTM C645, A653, and A1003.
3. Galvanized sheet steel meets or exceeds requirements of ASTM A924 & A1003.