

# DriftClip® DSLD

Interior Head of Wall

The Steel Network, Inc.

www.steelnetwork.com


1-888-474-4876



### Material Composition

ASTM A1003/A1003M Structural Grade 50 (340) Type H, ST50H (ST340H): 50ksi (340MPa) minimum yield strength, 65ksi (450MPa) minimum tensile strength, 33mil minimum thickness (20 gauge, 0.0346" design thickness) with ASTM A653/A653M G60 (Z180) hot dipped galvanized coating.

The attachment of DriftClip DSLD to the primary structure utilizes step bushings designed for #8 (0.164") screws. Designing this connection is the responsibility of the Structural Engineer of Record, and a minimum of two fasteners must be used.

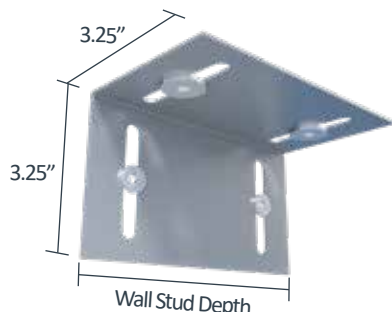

US Patent #6,612,087

### DriftClip DSLD Allowable (Unfactored) Loads<sup>1</sup>

DriftClip® DSLD, Recommended Allowable Load (lbs): F2							
Stud		Fastener Pattern 1			Fastener Pattern 2		
Thickness Mils (ga)	Yield Strength (ksi)	DSLSD362 w/2 #8 Screws	DSLSD600 w/2 #8 Screws	DSLSD800 w/2 #8 Screws	DSLSD362 w/2 #8 Screws	DSLSD600 w/2 #8 Screws	DSLSD800 w/2 #8 Screws
18 (25)	33	70	132	132	27	107	132
27 (22)	33	70	178	199	27	107	183
33 (20)	33	70	178	199	27	107	183
33 (20)	50	70	178	199	27	107	183
43 (18)	33	70	178	199	27	107	183
43 (18)	50	70	178	199	27	107	183
54 (16)	33	70	178	199	27	107	183
54 (16)	50	70	178	199	27	107	183
<b>Maximum Allowable Clip Load</b>		<b>70</b>	<b>178</b>	<b>199</b>	<b>27</b>	<b>107</b>	<b>183</b>

### Notes:

1. Design loads are for attachment of DriftClip DSLD to stud only.
2. Allowable loads have not been increased for wind, seismic, or other factors.
3. DriftClip DSLD allows up to 2" of vertical deflection (1" up and 1" down), and 2" of lateral drift (1" left and 1" right) in plane. Deflection requirements greater than 2" of lateral drift are available.
4. #8 screws are provided for each step bushing attachment to studs.
5. Attachment of structure to be engineered by others.
6. For LRFD strengths contact TSN technical services.

### Nomenclature

DriftClip DSLD is classified by multiplying stud depth by 100.



**Example:** 6" stud depth

**Designate:** DriftClip® DSLD600

### Load Direction



**Fastener Patterns**

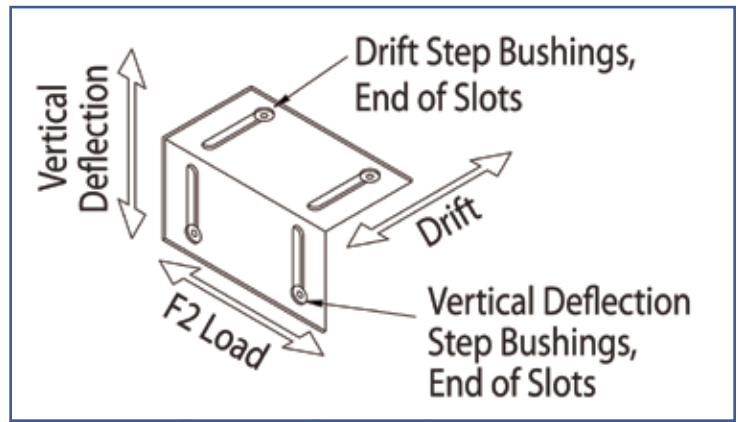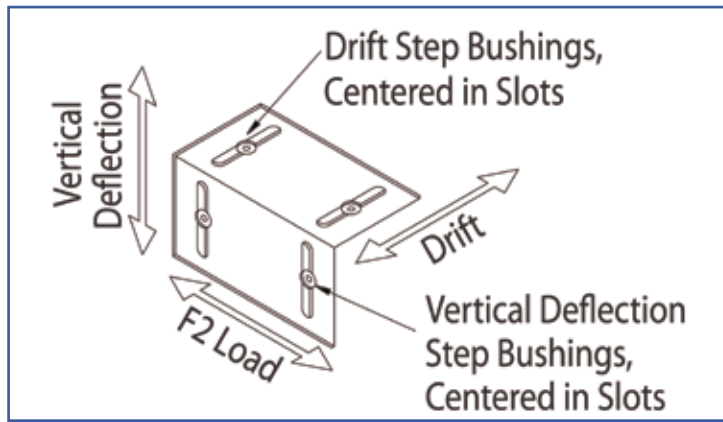

**Fastener Pattern 1** replicates a condition of out-of-plane wind or seismic force with no vertical live load deflection or in-plane drift.


**Fastener Pattern 2** replicates a condition of out-of-plane wind or seismic force with full vertical live load deflection and full in-plane drift.



UL2079 Head of Wall Assemblies



DriftClip DSLD362/400, DSLS600 & DSLD800  
ICC-ESR-2049  
www.icc-es.org



DriftClip DSLD Series  
Blast and Seismic Design Data  
www.steelnetwork.com

**\*\* For more information or to review a copy of each of these reports, please visit our website at <http://www.steelnetwork.com/light-steel-framing-design-resources>**